




PLAN  
Scale: None

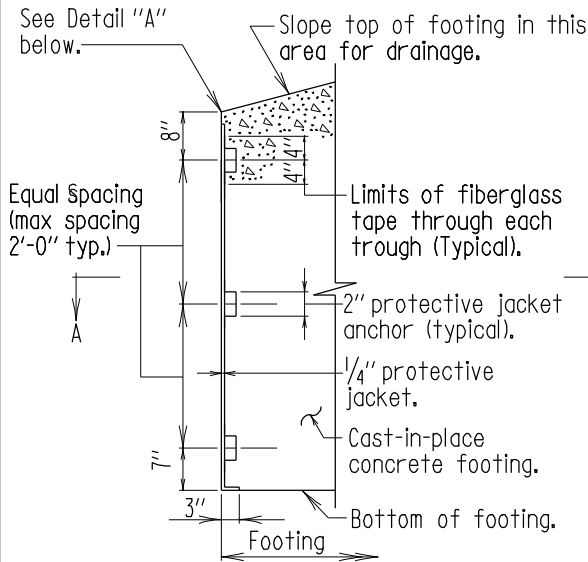


SECTION B-B  
Scale:  $\frac{3}{8}" = 1'-0"$

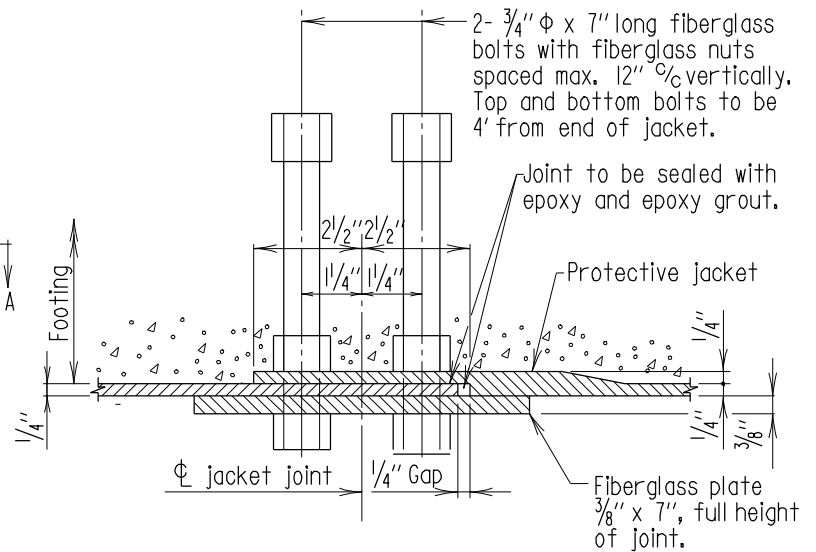

PROTECTIVE JACKET JOINT DETAIL  
Scale:  $3" = 1'-0"$

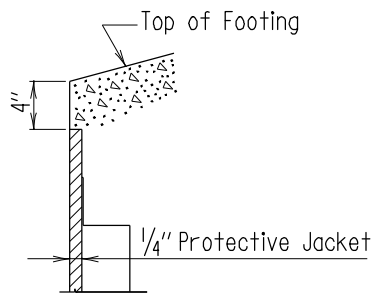

DETAIL A  
Scale: None

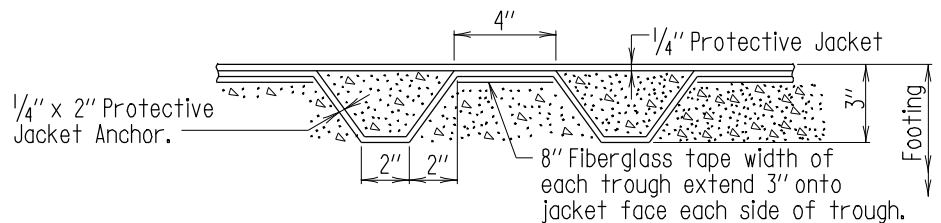

SECTION A-A  
Scale:  $1 1/2" = 1'-0"$

Notes:

1. For Fiberglass requirements see 921.11.
2. For other fiberglass and epoxy grout material requirements see Special Provisions.
3. Inside of jacket shall be thoroughly cleaned.

APPROVAL	
<i>P. S. Friedman</i> DIRECTOR OFFICE OF BRIDGE DEVEL.	
DATE: 12/24/86	
REVISIONS	
SHA	FHWA
1-26-88	6-8-90
2-19-93	.
11-17-97	.
1-22-01	.

FHWA APPROVAL  
DATE: 6-8-90

STATE OF MARYLAND  
DEPARTMENT OF TRANSPORTATION  
STATE HIGHWAY ADMINISTRATION  
OFFICE OF BRIDGE DEVELOPMENT

FIBERGLASS JACKET FOR  
CAST-IN-PLACE CONCRETE FOOTING

STANDARD NO. BR-SB(6.11)-86-185

SHEET 1 OF 1